



BRINGS NATURE IN



BRINGS NATURE IN

ALUMINIUM SYSTEMS

POLYGAL

Plastics Industries Ltd.
Ramat Hashofet 19238, Israel
Tel: 972-4-9596222
Fax: 972-4-9596284
E-mail: sales@polygal.com

POLYGAL Inc.

P.O.Box 410592, Charlotte,
NC 28241 USA
Tel: 1-704-588-3800
Fax: 1-704-588-7400
E-mail: usasales@polygal.com

Polygal Vostok LLC

Russia, 142620, Moscow rgn,
Kurovskoe, Sovetskaya str. 105.
Tel: (496) 411-01-79
E-mail: vostok@polygal.com
www.polygalvostok.com

Polygal Sud S.A.


Los Nogales S/N, Lote 21 - 22,
Condomino Industrial Segunda Orbital,
Comuna de Lampa, Santiago - Chile
Tel: 56-2-392-0000
Fax: 56-2-392-0045
E-mail: sudsales@polygal.com

www.polygal.com

Technical Support:
techsupport@polygal.com

AlprofUS-1110-06
Yasour  Kater

The data in this advertisement is provided in good faith and constitute general information without commitment, and no warranty is given or implied. Polycarbonate is a combustible thermoplastic material that complies with various international standards, as customary in each country. Avoid exposure to excessive heat or aromatic cleaning solvents. Normal fire precautions should be taken to protect against combustion.

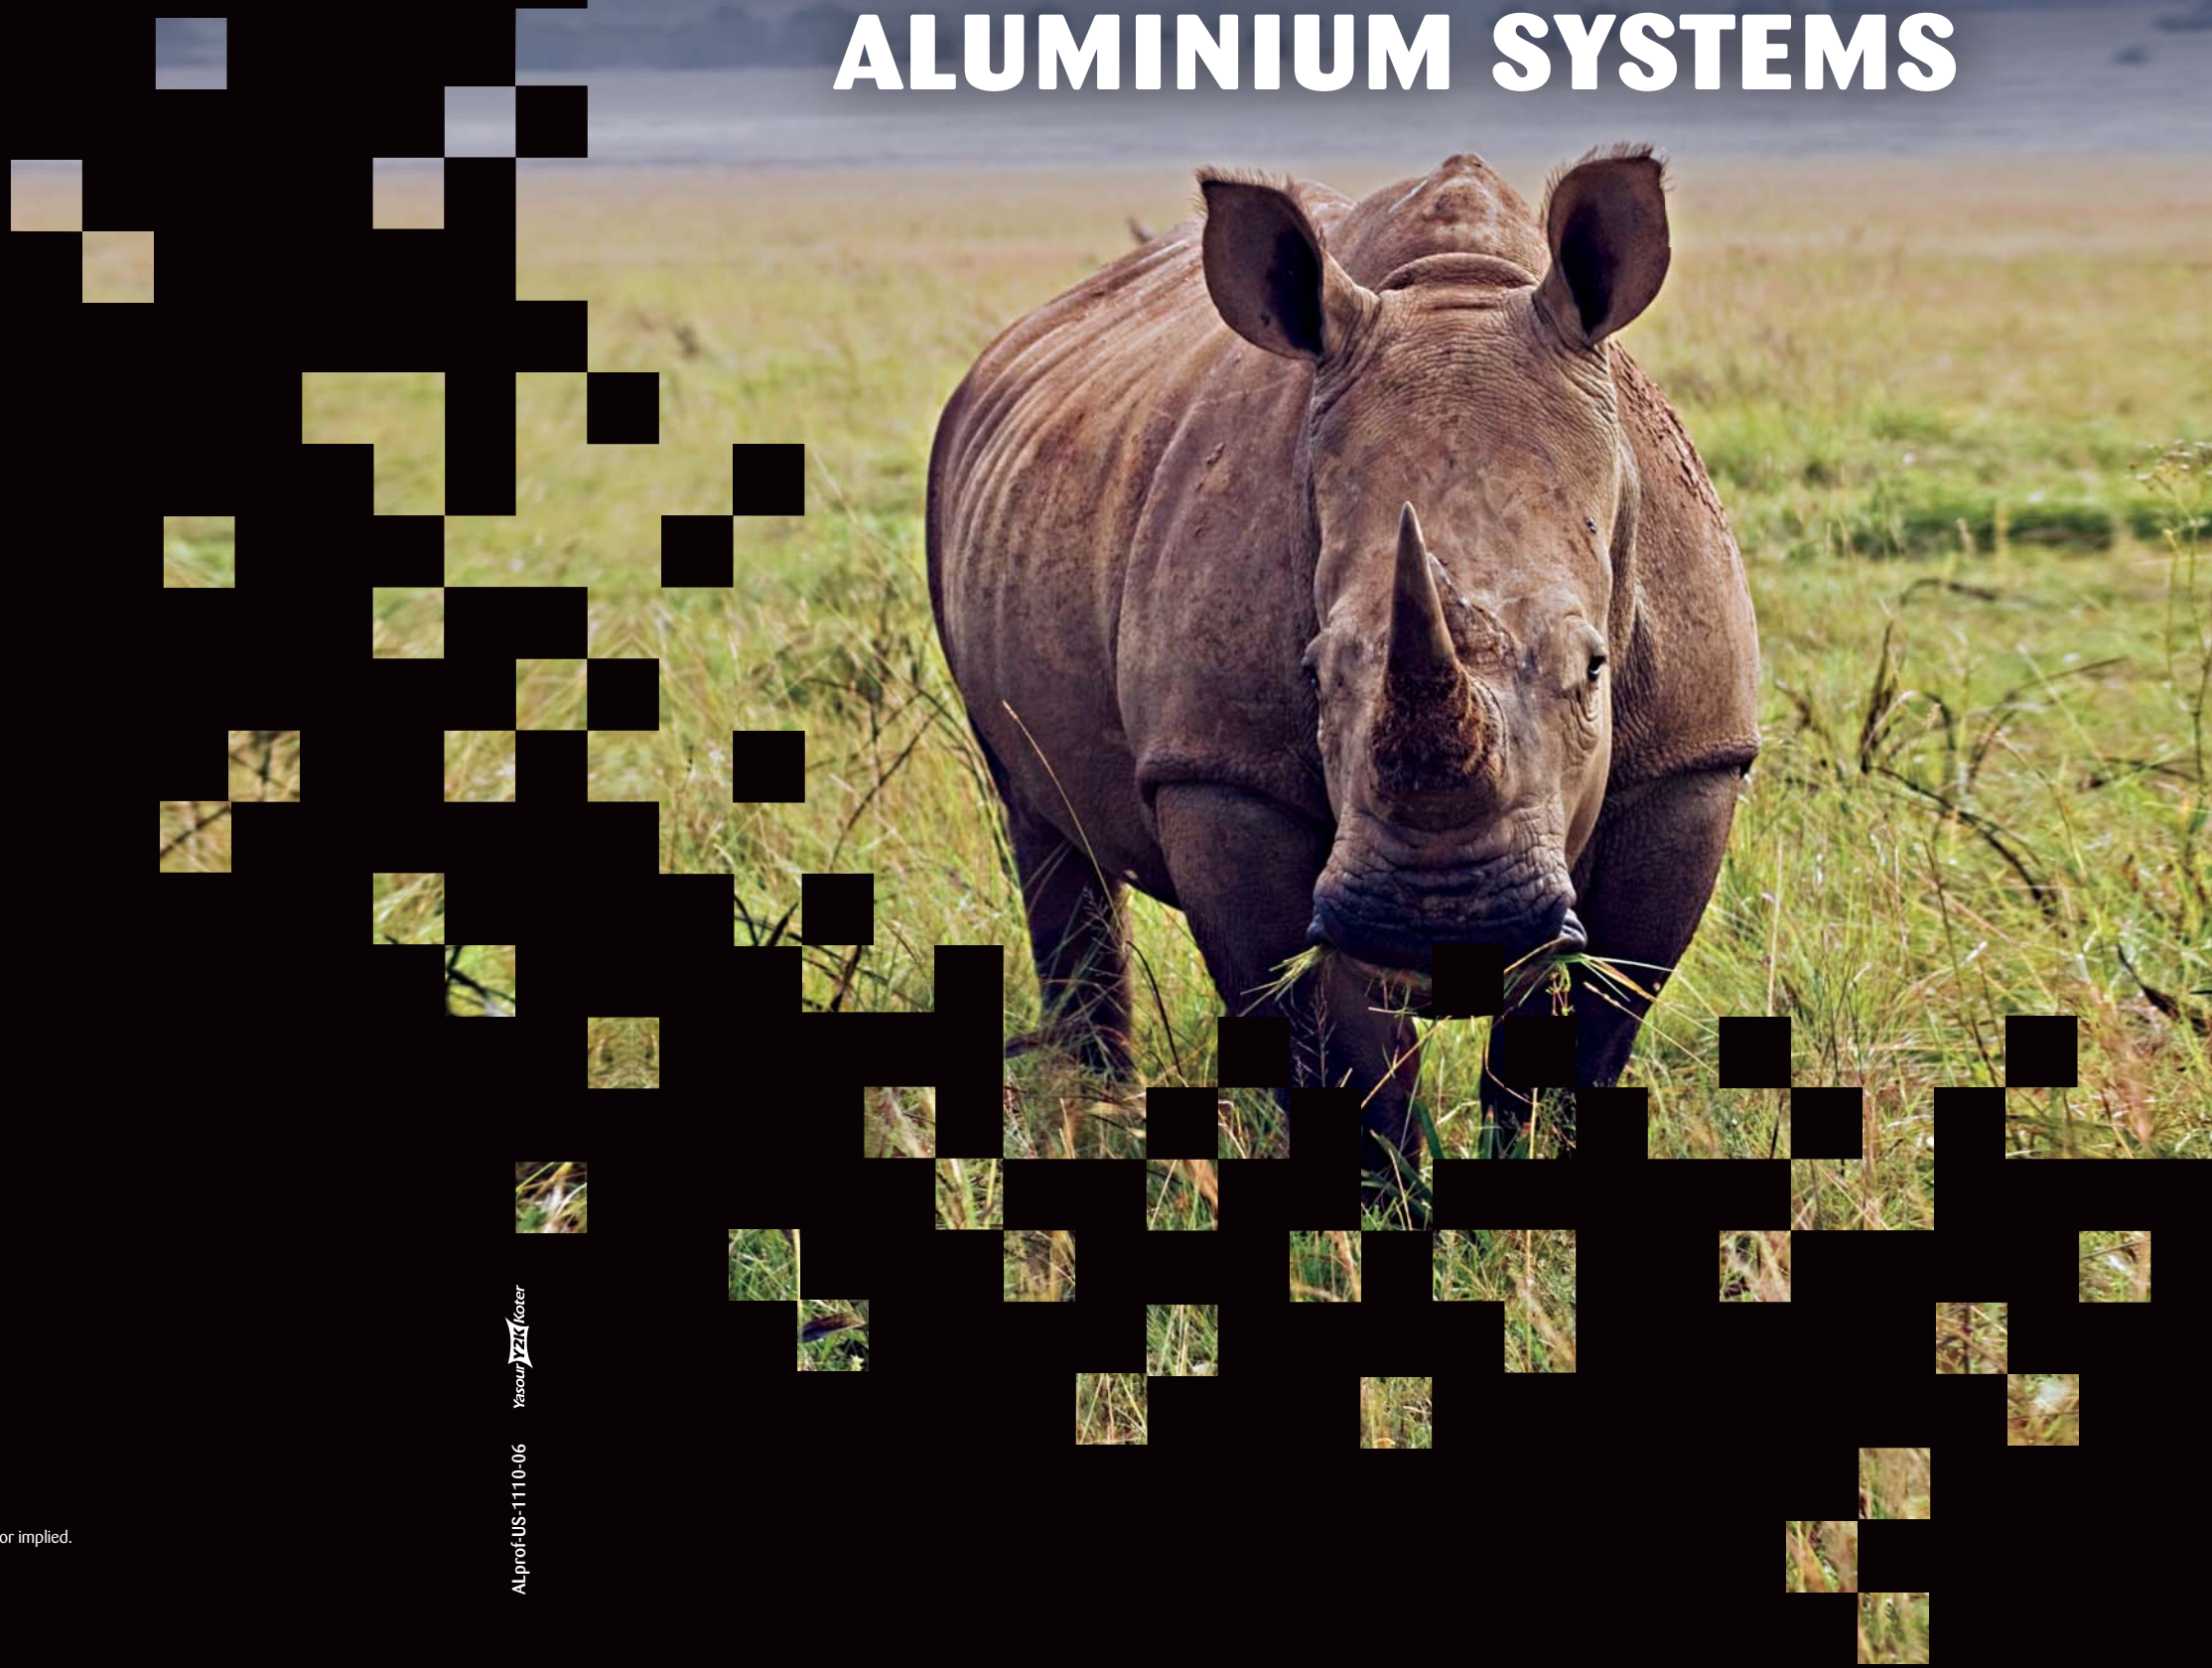

Polygal Aluminium Systems

Polygal Aluminium Profile (dimensions in mm)	Cat. No.	Function	Sheet Thickness
	306	6-35 Cap profile	25-35 (mm)
	307	6-35 Base profile	25-35 (mm)
	308	Screw cover profile	6-35 (mm)
	309	6-35 Spacer profile	25-35 (mm)
	352	Mega-Lock AGS Pressure Profile	6-16 (mm)
	353	Mega-Lock AGS Base profile	6-16 (mm)
	311	UA Edge profile	8 (mm)
	312	UA Edge profile	10 (mm)
	313	UA Edge profile	16 (mm)
	314	UA Edge profile	25 (mm)
	320	UA Edge profile	32 (mm)
	318	TCP Side profile	16 (mm)
	319	TCP Edge profile	16 (mm)
	324	TCP Base profile	16 (mm)

Mega-Lock Glazing System

Specially designed for use in glazing with 6 – 16 polycarbonate multi wall sheets in urban applications such as covered walkways, entrance-ways, parking spaces, bus stations and other similar applications. Mega-Lock Glazing System has a rabbet depth of 25 mm (1") which enhances its fastening properties and prevents glazing failures due to wind and snow loads or thermal expansion.

Polygal 6-35 Glazing System

A large-span clamping system specially developed for glazing applications using 8-35 mm thick Polycarbonate structured sheets. Sheets are mounted on the system's load-bearing elements during construction of transparent and semi-transparent roofing. The system's large rabbet depth (30mm-13/16" - overlap) makes sheets fastening easier, and helps prevent glazing failures due to wind and snow loads or thermal expansion.

General information

Screw Attachment

The base profile is designed so that the load is transferred by special geometric extensions which facilitate easy installation and prevent screwhead strain during attachment. Therefore, make sure to use only Polygal recommended screws in distances not more than 250 mm.

Profile Bending

The aluminium profiles can be bent using a bending machine or manually, using a steel bending guide. Make sure to use only profiles with appropriate radius and shape which do not contain loads contrary to their line of installation.

Gaskets

The use of original Polygal gaskets is required. These gaskets are manufactured from materials which do not damage the Polycarbonate panels. The gaskets contain 4 "legs" to prevent dust and water penetration, and are installed with the "legs" facing outward. The gaskets should be installed in the workshop using a suitable roller.

Professional Guidance, Information & Construction Responsibility





- The system includes both construction and edge finishing aluminium profiles, as well as various screws and EPDM gaskets, which are designed for panel glazing at the level of safety and structural standards required for roofing applications.
- Polygal assumes that roofing contractors are expert and skilled in their field in general, and with regard to construction and roofing in particular. Therefore, the full responsibility for the installation of panels, the proper attachment between the panels themselves and between the panels and parts of the structure, as well as the full support of the panels against natural forces and standard building loads remains with the roofing.
- Polygal is pleased to offer its customers professional guidance regarding installation as well as additional information, whenever possible.

Polygal Accessories

Screws	Function	Cat. No.	Suitable for Sheet thickness
	Glazing profiles connection screw (GPS Mega-Lock)	430	6-10 mm
		431	16 mm
	Glazing profiles connection screw (GPS 6-35)	428	25 mm
		429	32-35 mm
	(ETC) Self drilling screw	424	All thickness

Seals	Cat. No.	Description
	505	Fixing Button
	080	
	474	EPDM + INOX fixing dome
	507	POLYGAL Silicon
	524	EPDM gasket

Sealing tapes	Cat. No.	Width		Suitable for Sheet thickness		Description	Standard length of Rolls	
		mm	inch	mm	inch		m	ft
	508	25	1"	8	5/16"	Antidust Tape (AST)	33	108'
	509	38	1 1/2"	10/16	3/8", 5/8"			
	510	50	2"	25	1"			

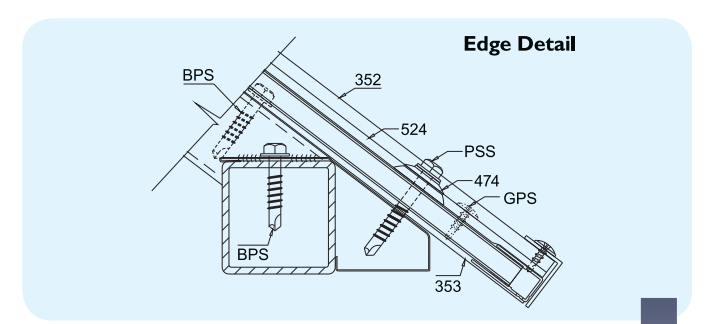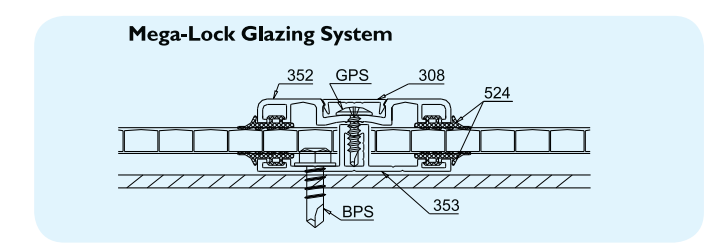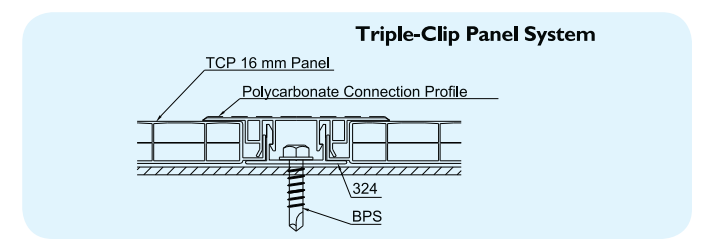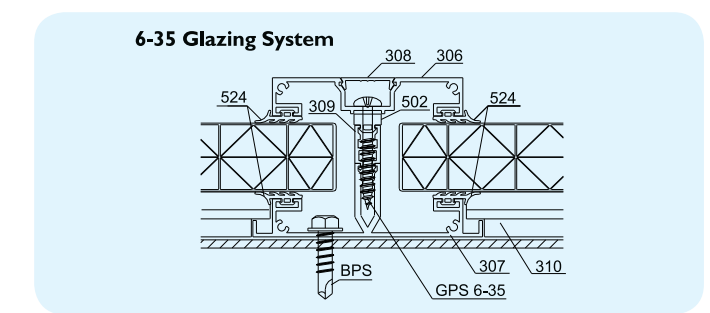

Polygal is the leading manufacturer of structured polycarbonate sheets, and is known throughout the world for the outstanding quality of its products. Polygal was the first manufacturer in the world to create structured polycarbonate sheets, and over the last 30 years has developed and produced a broad spectrum of these products, which are successfully covering a full array of structures worldwide.

